Mobile Satellite Services Terminal Reporting Terminal (Handheld Data Reporting Terminal)

Features


- Support 1.2 Kbps data rate from terminal to HUB
- Small message reporting
- In-built GPS to provide position
- RS232/USB/ Bluetooth user data interface
- Low Power & Weight
- Handheld with Size: 220 x 88 x 40 mm
- Weight: 450 gm (with battery) 160 gm (without keypad & display)

Specifications

- Single patch antenna having 2.5 dBi gain over ±45 deg
- Terminal EIRP: -1 dBW at 0.5W power amplifier
- Burst mode transmission rate 1.2 Kbps (Terminal to HUB)
- 1 sec. time slot to accommodate large no of terminal in single carrier
- Rate 1/2 forward error correction
- BPSK Modulation

GSAT-6

- Band width required 3.2 KHz
- Channel spacing 10.0 KHz

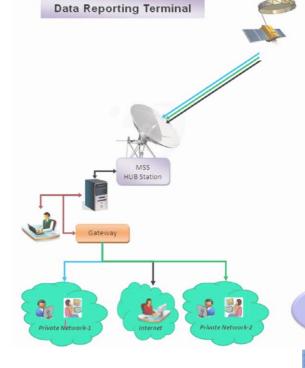

Major Applications

- Terminal to Hub Location Reporting
- Data collection platforms
- Short Message Services
- Asset Tracking Services



